

ASSEMBLY INSTRUCTIONS

TALON TABLES

*NOTE: Please count and inspect all pieces before disposing of any carton or packing materials.
All units consist of 2 cartons consisting of the following.*

TOP CARTON

When ordering components, specific color and/or size information may be required.
Contact a Mayline Customer Service Representative. 1-800-822-8037

<u>REF#</u>	<u>QTY.</u>	<u>DESCRIPTION</u>	<u>PART NO.</u>	
1	1	Top	CALL ~-~**	** Denotes Color Code ~-~Denotes Size

BASE CARTON

<u>REF#</u>	<u>QTY.</u>	<u>DESCRIPTION</u>	<u>PART NO.</u>	
2	1	Base Assembly	CALL ~-~**	* Individual Items, Order by part number.

HARDWARE BAG (Part No. 8200355)


<u>REF#</u>	<u>QTY.</u>	<u>DESCRIPTION</u>	<u>PART NO.</u>
E5	2	Top Mounting Brackets	8200515 *
E6	8	Screw, 1/4-20 x 3/4	700124 *
E7	2	Plastic Inserts	8200157 *

HARDWARE BAG (Part No. 610236)

<u>REF#</u>	<u>QTY.</u>	<u>DESCRIPTION</u>	<u>PART NO.</u>
E1	2	Plastic Leg Clip	600379 *
E2	4	Screw, #10 x 5/8	5018217 *
E3	2	Ganging Bracket	B7523 *
E4	4	Knob, 1/4-20 x 1/2	K37 *

Tools Required for Assembly

Allen Wrench 5mm or 3/16", Allen Wrench 4mm or 5/32", Hammer, Phillips Screw Driver
Note: A Magnetic or Power Driver may be used to assist in assembly.

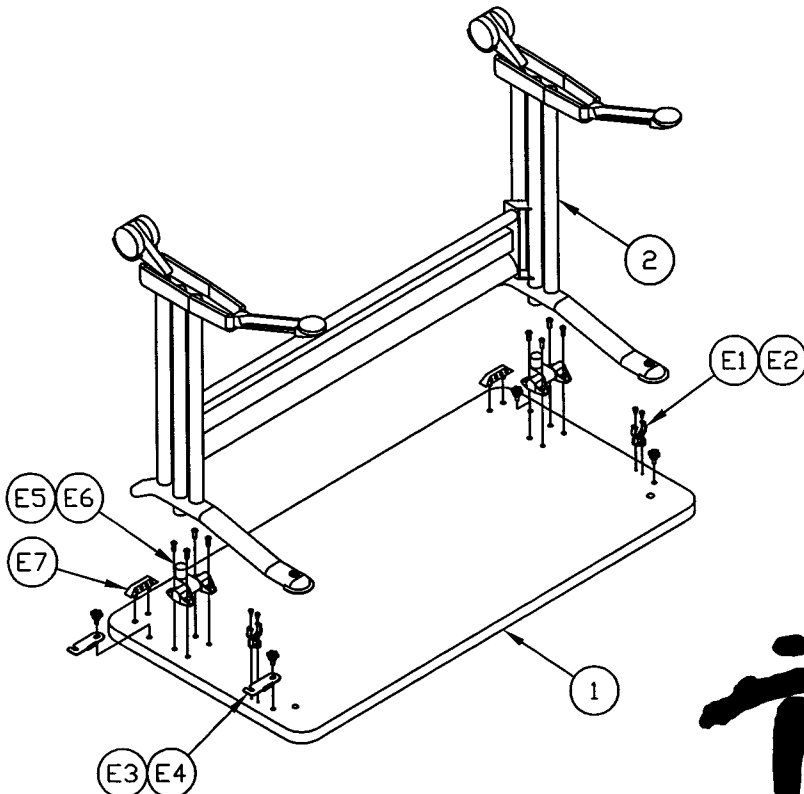


Tiffany Industries™
A MAYLINE GROUP COMPANY

619 N. Commerce, P.O. Box 728 Toll Free: 1-800-822-8037
Sheboygan, WI 53082-0728 FAX: 920-457-7388
On Line: www.mayline.com

1. Begin Assembly by Flipping Base upright. Rotate top tube at approximately 90° from the modesty panel as shown in Fig. #1. Begin assembly by locating the Top Mounting Brackets (E5) and inserting them into the round leg tube as shown in Fig. #2. Caution: Correct rotation and insertion is critical to proper operation of the unit.

2. With a 5mm or 3/16" Allen Wrench firmly tighten the screw in the top of the Top Mounting Bracket. The compression fitting can not be over tightened by hand.

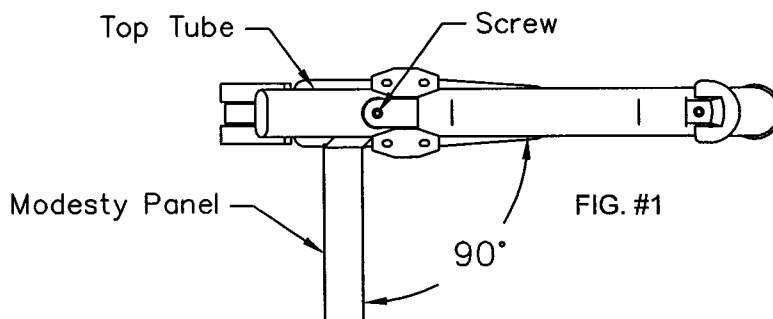

INCORRECT INSERTION

CORRECT INSERTION



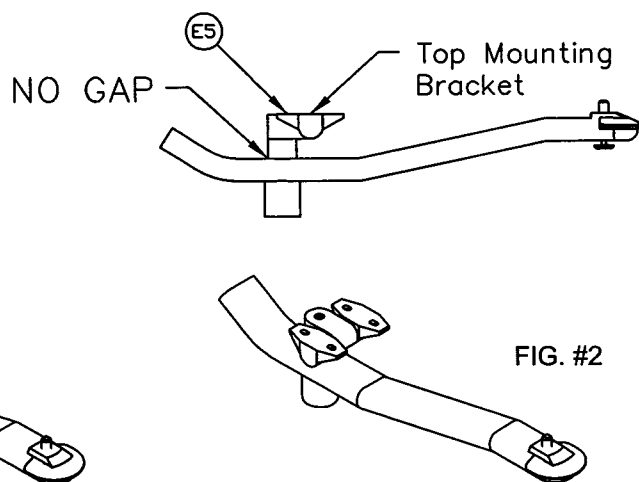


FIG. #2

3. Place the Top (1) face down on a clean, flat surface. Attach Plastic Inserts (E7) by aligning the stubs with the pre-drilled holes in the Top. Tap firmly with a hammer until inserts are tight against the Top. See Fig. #3


4. Attach Leg Clips (E1) into the pre-drilled holes in the Top using Screws (E2). See Fig. #3

5. Position the Base Assembly as shown in Fig #4. With a 4mm or 5/32" Allen Wrench install eight Screws (E6) through the Mounting Bracket (E5) into the metal inserts in the Top. Do Not tighten at this time. Adjust the frame so the Locating Pin properly seats itself into the center of the locating hole in the Top. See Fig. #5. Return to the eight Screws (E6) and tighten at this time. Caution: Over tightening may cause damage not covered by warrantee.

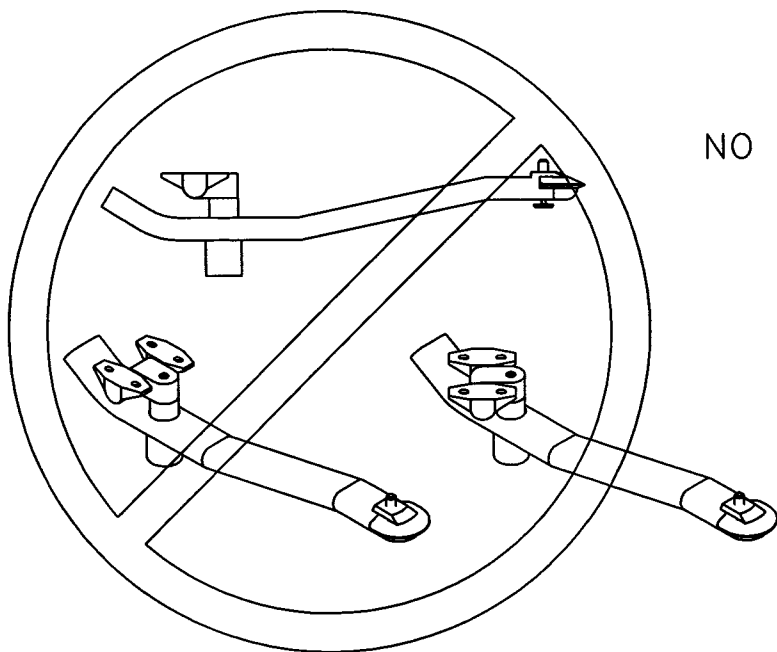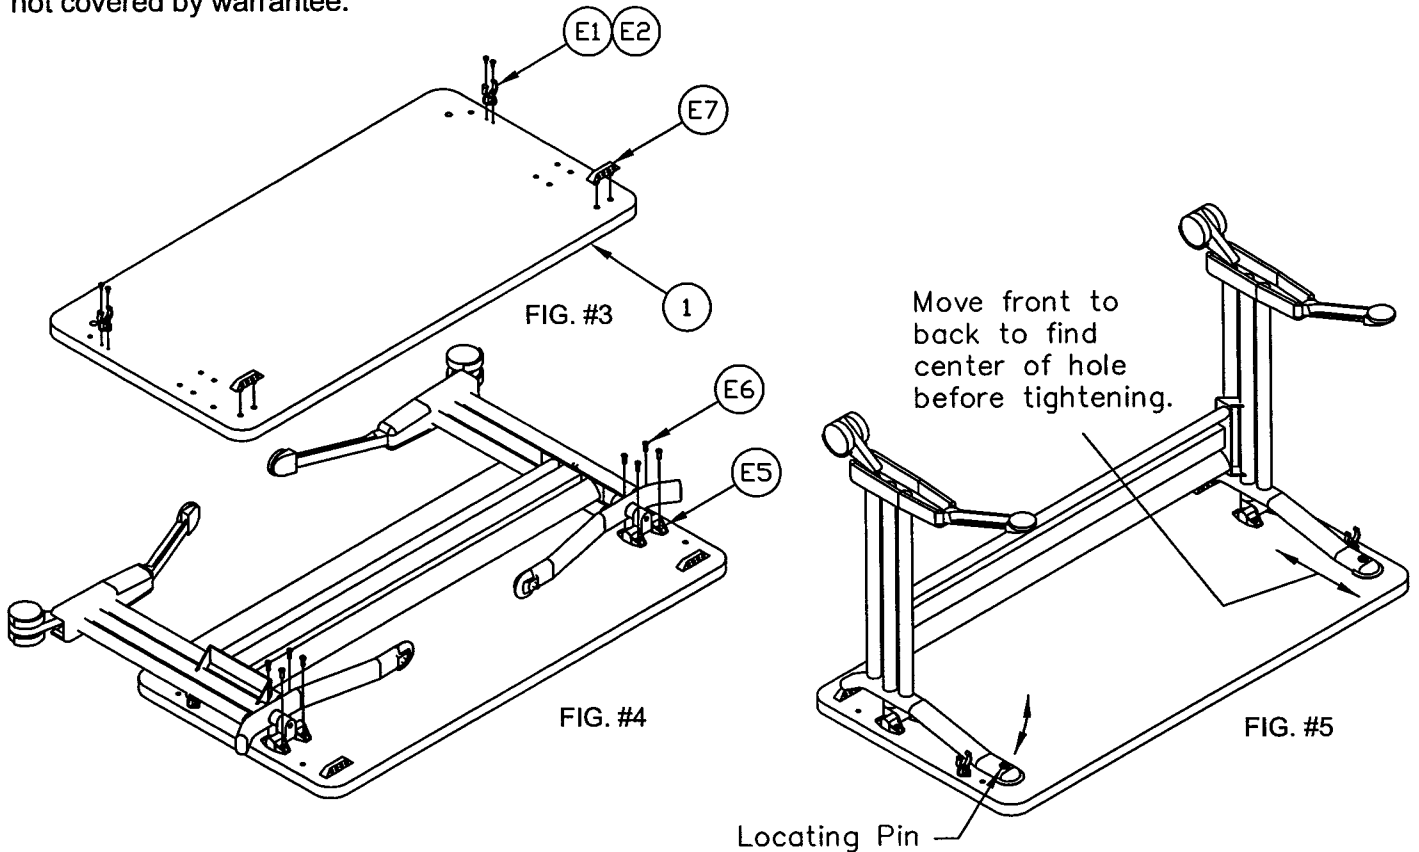


6. Attach Ganging Brackets with tables in upright, leveled and approximate position. Insert Knobs (E4) through the Ganging Brackets (E3) into the metal inserts in the Top. Do not tighten Knobs at this time. See Fig. #6

7. Rotate the Ganging Bracket (E3) under the Knob (E4). Tighten Knobs. See figure #7.

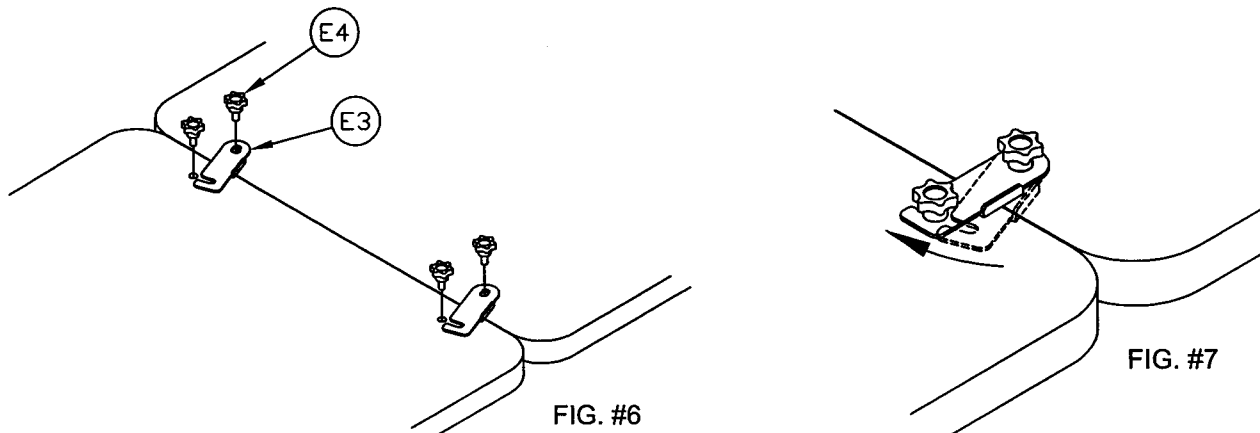

Adjustable Height Base Operation


Units with the adjustable height base adjust with the lever located just to the inside of each leg frame. Gently pushing the lever up to the top will release the mechanism and the table should elevate. To lower, gently push up on the lever with one hand and with the other hand simultaneously push down on the desk top to the desired height. Excessive force is not required to activate the levers and may result in damage as well as trying to activate the lever in any other manner.

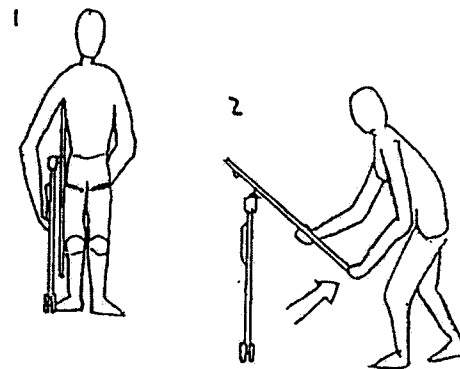


Folding Instruction

1. To begin the unfolding process the unit must first be in a vertical position. See illustration #1 and #2

2. With the Talon table located in the vertical position, stand on the side shown in illustration #2 and raise the top as shown.

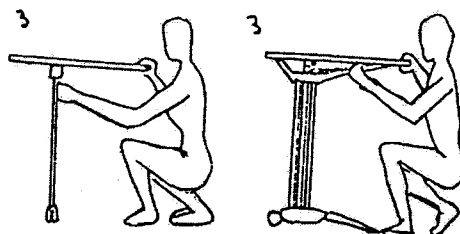

3. Holding the top in an elevated position, open one of the legs until it reaches INITIAL POSITION. At this point you will hear a "click" that will indicate the locating pin has secured the top in the correct position. Repeat for opposite leg.

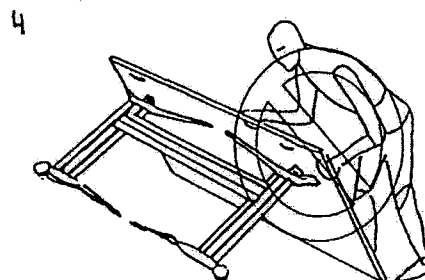

4. The Talon table must NEVER be assembled or disassembled in the position shown in illustration #4. Attempting to do so will result in severe damage to the table.

BASE WARRANTY PARTS IDENTIFICATION NOT INCLUDED IN ASSEMBLY

REF#	QTY.	DESCRIPTION	PART NO.	NOTES	
3	2	Top Tube Cap.	2073054L *		<i>* Individual Items, Order by part number.</i>
4A	2	Locating Pin Assy.	8200230M *	(Tube Design Frame)	
4B	2	Locating Pin Assy.	8200230 *	(Die Cast Arm Frame)	
5	2	Shoe Assy.	8200235M *	(2 Complete Shoes in one Bag)	
6	2	Toe Cap Screw	8200213 *		
7	2	Toe Cap Leveler	8200214M *		
8	2	Toe Cap	8200215M *		
9	2	Toe Cap Pin	8200212M *		
10	2	Pneumatic Handle	8200248 *	(Adjustable base only)	
11	2	Handle Bracket	8200245 *	(Adjustable base only)	
12	2/Shoe	Screw For Shoe Assy.	8200232 *		
13	1	Wheel Assy.	8200264 *		

(10) (11) Not Shown.

